

ADAM-5000 Series



Open Network and Fieldbus Solutions for Device Networking

Introduction

The Fieldbus concept will change the control environment and device characteristics of future control systems in both processing and manufacturing. Compared with traditional systems, the Fieldbus system reduces cost of cabling, commissioning, and installation. In addition, the Fieldbus system has greater reliability.

The ADAM-5000 series, a compact distributed data acquisition and control system, supports the shift toward Fieldbus-based systems. Based on popular Fieldbus data communication structures such as RS-485 and Modbus, the ADAM-5000 series now offers two different DA&C systems that allow field I/O devices to easily connect to PC network applications: the ADAM-5000 DA&C systems and the ADAM-5510 series of PC-based controllers.



Distributed I/O Systems

Ethernet-based Data Acquisition and Control System

With the ADAM-5000/TCP as your Ethernet I/O data processing center, you can monitor and control field signals at a speed of 10/100 Mbps. The best field-proven communication performance that can be reached in industrial network environments. Additionally, the popular Modbus/TCP protocol is supported as well.

RS-485 based Data Acquisition and Control System

The ADAM-5000/485 system is a data acquisition and control system that can acquire, monitor and control data through multi-channel I/O modules. It communicates with a network master over a twisted-pair, multi-drop RS-485 network. Both ADAM ASCII and Modbus/RTU protocols are supported.

PC-based Controllers

Ethernet-enabled PC-based Controllers

The ADAM-5510 series of PC-based programmable controllers includes ADAM-5510M, ADAM-5510E, ADAM-5510/TCP and ADAM-5510E/TCP. They feature Intel x86-based CPUs running Datalight ROM-DOS.

Users can use Borland C 3.0 to develop the application program and then download it by Windows-based ADAM-5510 series utility. The Ethernet-enabled feature of ADAM-5510/TCP and ADAM-5510E/TCP enables features like: FTP server, web server, TCP/UDP connections and email alarm. The ADAM-5510 controllers also have high expansion capability by supporting Modbus/RTU master/slave and Modbus/TCP client/server functions.

ADAM-5550CE features AMD GX2 CPU running Windows CE operating system. Users can use Microsoft Visual Studio .NET to develop the application program.

ADAM-5550KW and ADAM-5510KW series allow users leverage IEC 61131-3 SoftLogic programming environment to complete their automation task.

1
WebAccess+ Solutions

2
Motion Control

3
Power & Energy
Automation

4
Automation Software

5
Intelligent Operator
Panel

6
Automation Panels

7
Panel PCs

8
Industrial Wireless
Solutions

9
Industrial Ethernet
Solutions

10
Industrial Gateway
Solutions

11
Serial communication
cards

12
Embedded Automation
PCs

13
DIN-Rail IPCs

14
CompactPCI Systems

15
IoT Wireless I/O
Modules

16
IoT Ethernet I/O
Modules

17
RS-485 I/O Modules

18
Data Acquisition
Boards

Distributed I/O Systems & PC-based Controllers

Maximum System Design Flexibility

The ADAM-5000's modular design allows users to tailor solutions based on their own requirements. Built-in programmable I/O ranges and alarm outputs enhance flexibility in system design. A variety of communication media such as twisted-pair wiring, radio modems and fiber optics are supported.

System Maintenance and Troubleshooting

The ADAM-5000 series uses hardware self-test and software diagnosis to monitor system problems. Also included is a watchdog timer that monitors the microprocessor. If the system crashes, the watchdog automatically resets the system. Node ID setting is easily accomplished by setting a DIP switch on the front of the system.

Easy Installation and Networking


The ADAM-5000 series can be easily mounted on a DIN-rail or on a panel. Signal connections, network modifications and maintenance are simple and quick. Building a multi-drop network only requires a single twisted pair of wires.

Proven for Industrial Environments

The ADAM-5000 series can operate in industrial environments at temperatures between -10 and 70°C, and can use unregulated power sources between 10 and 30 V_{DC}. These units are protected against accidental power supply reversals. A 3-way isolation design (I/O, power & communication) prevents ground loops and reduces the effect of electrical noise in the system.

Extensive Software Support

The ADAM-5000 series is supported by most standard process controls and HMI software. .NET Class LIB is provided for use with Windows applications. OPC drivers provide links to a wide range of HMI/SCADA software packages such as InTouch, FIX and ICONICS. Advantech data acquisition software and Advantech Studio SCADA/HMI software are both tightly integrated with the ADAM-5000 systems.

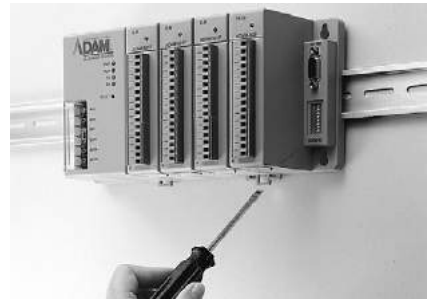

DIN-rail Mounting

Installed on industrial standard DIN-rails



Panel/Wall Mounting

Flat surface system mounting



Node ID Setting


8-pin dip switch configuration



Connection

Pre-wired plug-in terminals with I/O modules

Simple & Low Cost Network

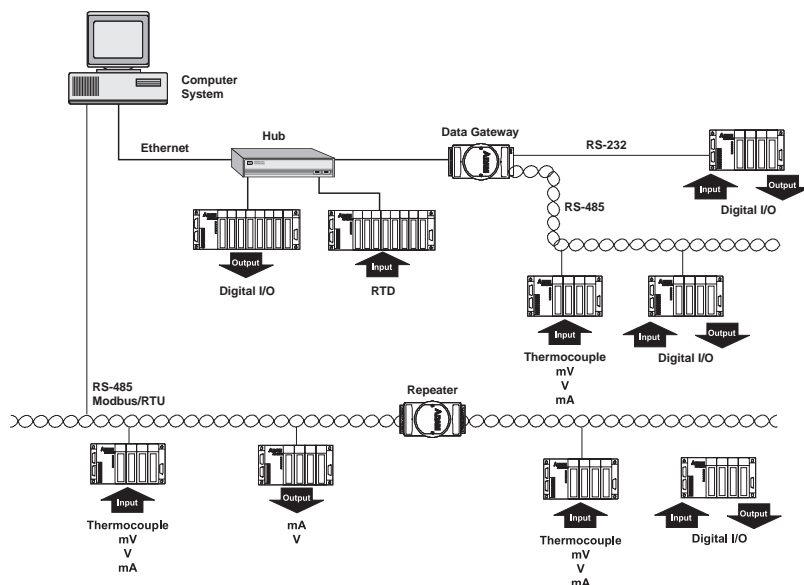

ADAM-5000 Controller Selection Guide



NEW



System		ADAM-5510M ADAM-5510KW	ADAM-5510E	ADAM-5510/TCP ADAM-5510KW/TCP	ADAM-5510E/TCP ADAM-5510EKW/TP	ADAM-5560
CPU		80188				Intel Atom Z510P 1.1 GHz
RAM		640 KB				1 GB DDR2 SDRAM
Flash ROM		256 KB				-
Flash Memory		256 KB				-
Flash Disk		1 MB				-
OS		ROM-DOS				WinCE5.0/XP embedded
Control Software		ADAM-5510M: Borland C ADAM-5510KW: KW SoftLogic	Borland C	ADAM-5510/TCP: Borland C ADAM-5510KW/TCP: KW SoftLogic	ADAM-5510E/TCP: Borland C ADAM-5510EKW/TP: KW SoftLogic	ADAM-5560CE: C/C++ and .NET ADAM-5560KW: KW SoftLogic
Real-time Clock		Yes				
Watchdog Timer		Yes				
COM1		RS-232	RS-232/485	RS-232	RS-232/RS-485	RS-232/485
COM2		RS-485				
COM3 (Programming)		RS-232 (TX, RX, GND)				RS-232/485
COM4		RS-232/485				
I/O Slots		4	8	4	8	7
Power Consumption		4 W				17 W
Isolation	Communication	2,500 V _{DC} (COM2 RS-485)				2,500 V _{DC} (COM2 RS-485) 1,500 V _{DC} (COM1, COM3, COM4 RS-485)
	Communication Power	3,000 V _{DC}				
	I/O Module	3,000 V _{DC}				
Diagnosis	Status Display	Power, CPU, Communication, Battery				Power, User Define
	Self Test	Yes, while ON				
	Software Diagnosis	Yes				
Communication	Interface	RS-232/485		Ethernet (RJ-45)		Ethernet (2 x RJ-45)
	Speeds	1,200 bps ~ 115.2 kbps		10/100 Mbps		10/100 Mbps
	Max. Distance	4,000 feet (1.2 km)		100 m		100 m
	Data Format	N, 8, 1, 1		-		-
	Max. Nodes	32	32	256 for Ethernet, 32 for RS-485	256 for Ethernet, 32 for RS-485	256 for Ethernet, 32 for RS-485
	Protocol	User Defined, Modbus/RTU	User Defined, Modbus/RTU	User Defined, Modbus/RTU, Modbus/TCP	User Defined, Modbus/RTU, Modbus/TCP	Modbus/RTU, Modbus/TCP
	Remote I/O	Modbus Device				
	Power Requirements	10 ~ +30 V _{DC}				
Environment	Operating Temperature	-10 ~ 70°C (14 ~ 158°F)				0 ~ 55°C (32 ~ 131°F)
	Storage Temperature	-25 ~ 85°C (-13 ~ 185°F)				
	Humidity	5 ~ 95%				
Dimensions (mm)		231 x 110 x 75	355 x 110 x 75	231 x 110 x 75	355 x 110 x 75	355 x 110 x 75
Page		13-37	13-37	online	online	13-35

1
WebAccess+ Solutions

2
Motion Control

3
Power & Energy
Automation

4
Automation Software

5
Intelligent Operator
Panel

6
Automation Panels

7
Panel PCs

8
Industrial Wireless
Solutions

9
Industrial Ethernet
Solutions

10
Industrial Gateway
Solutions

11
Serial communication
cards

12
Embedded Automation
PCs

13
DIN-Rail IPCs

14
CompactPCI Systems

15
IoT Wireless I/O
Modules

16
IoT Ethernet I/O
Modules

17
RS-485 I/O Modules

18
Data Acquisition
Boards

ADAM-5000 I/O Module Selection Guide



System		ADAM-5000/485	ADAM-5000E	ADAM-5000L/TCP	ADAM-5000/TCP
CPU		80188	80188	RISC CPU	
RAM		-	-	4 MB	
Flash ROM (User AP)		-	-	512 KB	
Flash Memory (Data Storage)		-	-	-	
Flash Disk		-	-	-	
OS		-	-	real-time OS	
Timer BIOS		-	-	-	
Real-time Clock		-	-	-	
Watchdog Timer		Yes			
I/O Slots		4	8	4	8
Power Consumption		3 W		4.0 W	5.0 W
Isolation	Communication	2,500 V _{DC}	3,000 V _{DC}	RS-485: 1,500 V _{DC}	
	Communication Power	3,000 V _{DC}			
	I/O Module	3,000 V _{DC}			
Diagnosis	Status Display	Power, CPU, Communication		Power, CPU, Error Diagnostic, Communication	
	Self Test	Yes, while ON			
	Software Diagnosis	Yes			
Communication	Interface	RS-232/485 (2-wire)	RS-232/485 (2-wire)	Ethernet	
	Speeds (bps)	1,200, 2,400, 4,800, 9,600, 19.2 K, 38.4 K, 57.6 K, 115.2 K	1,200, 2,400, 4,800, 9,600, 19.2 K, 38.4 K, 57.6 K, 115.2 K	10 M, 100 M	
	Max. Distance	4,000 feet (1.2 km)	4,000 feet (1.2 km)	100 m without repeater	
	Data Format	Advantech protocol: N, 8, 1 Modbus protocol: N, 8, 1 N, 8, 2 E, 8, 1 O, 8, 1	Advantech protocol: N, 8, 1 Modbus protocol: N, 8, 1 N, 8, 2 E, 8, 1	TCP/IP	
	Max. Nodes	128	128	Depend on IP address	
	Protocols	ADAM ASCII/Modbus Protocol	ADAM ASCII/Modbus Protocol	Modbus/TCP	
	Remote I/O	-	-	20 nodes Modbus devices	
	Power Requirements	+10 ~ +30 V _{DC}			
	Environment	Operating Temperature	-10 ~ 70°C (14 ~ 158°F)		
Storage Temperature		-25 ~ 85°C (-13 ~ 185°F)			
Humidity		5 ~ 95%			
Dimensions (mm)		231 x 110 x 75	355 x 110 x 75	231 x 110 x 75	355 x 110 x 75
Page		13-38	13-38	13-39	13-39

Analog Input/Output Modules



Module		ADAM-5013	ADAM-5017	ADAM-5017P	ADAM-5017UH	ADAM-5018
Analog Input	Resolution	16 bit	16 bit	16 bit	12 bit	16 bit
	Input Channel	3	8	8	8	7
	Sampling Rate	10 (total*)	10 (total*)	10 (total*)	200K**	10 (total*)
	Voltage Input	-	±150 mV, ±500 mV ±1 V, ±5 V, ±10 V	±150 mV, ±500 mV ±15V, ±10V, ±5 V, ±1 V 0 ~ 150mV, 0 ~ 500mV 0 ~ 1V, 0 ~ 5V, 0 ~ 10V 0 ~ 15V	±10 V, 0 ~ 10 V	±15 mV, ±50 mV ±100 mV, ±500 mV ±1 V, ±2.5 V
	Current Input	-	±20 mA	±20 mA, 4 ~ 20mA	0 ~ 20 mA, 4 ~ 20 mA	±20 mA
	Direct Sensor Input	Pt or Ni RTD	-	-	-	J, K, T, E, R, S, B
Isolation		3,000 V _{DC}	3,000 V _{DC}	3,000 V _{DC}	3,000 V _{DC}	3,000 V _{DC}
Page		online	online	online	online	online

*Sampling rate value depends on used channel number.

Example: Using 5 channels on ADAM-5017, sampling rate for each used channel will be 10/5 = 2 samples/second.

**The sampling rate vary with the controller.



Module		ADAM-5018P	ADAM-5024	ADAM-5050	ADAM-5051/ ADAM-5051D/ ADAM-5051S	ADAM-5052	ADAM-5053S
Analog Input	Resolution	16 bit	-	-	-	-	-
	Input Channel	7	-	-	-	-	-
	Sampling Rate	10 (total*)	-	-	-	-	-
	Voltage Input	±15 mV, ±50 mV ±100 mV, ±500 mV ±1 V, ±2.5 V	-	-	-	-	-
	Current Input	4 ~ 20 mA	-	-	-	-	-
	Direct Sensor Input	J, K, T, E, R, S, B	-	-	-	-	-
Analog Output	Output Channels	-	4	-	-	-	-
	Resolution	-	12 bit	-	-	-	-
	Voltage Output	-	0 ~ 10 V	-	-	-	-
	Current Output	-	0 ~ 20 mA 4 ~ 20 mA	-	-	-	-
Digital Input and Digital Output	Digital Input Channels	-	-	16 DI/O (bit-wise selectable)	16 (ADAM-5051) 16w/LED (5051D/5051S)	8	32
	Digital Output Channels	-	-	-	-	-	-
Isolation		3,000 V _{DC}	3,000 V _{DC}	-	2,500 V _{DC} (5051S)	5,000 V _{RMS}	2,500 V _{DC}
Page		online	online	online	online	online	online

*Sampling rate value depends on used channel number.

Example: Using 6 channels on ADAM-5017, sampling rate for each used channel will be 12/6 = 2 samples/second.

ADAM-5000 I/O Module Selection Guide

Digital Input/Output Modules



Module		ADAM-5055S	ADAM-5056/ ADAM-5056D	ADAM-5056S/ ADAM-5056SO	ADAM-5057S	ADAM-5060
Digital Input and Digital Output	Digital Input Channels	8 w/LED	-	-	-	-
	Digital Output Channels	8 w/LED	16 (ADAM-5056) 16 w/LED (ADAM-5056D)	16 w/LED	32	6 relay (2 form A/4 form C)
Isolation		2,500 V _{DC}	-	2,500 V _{DC}	2,500 V _{DC}	-
Page		online	online	online	online	online



Module		ADAM-5069	ADAM-5080	ADAM-5081	ADAM-5090/ ADAM-5091	ADAM-5095
Digital Input and Digital Output	Digital Input Channels	-	-	-	-	-
	Digital Output Channels	8 power relay (form A)	-	-	-	-
Counter (32-bit)	Channels	-	4	4/8	-	-
	Input Frequency	-	0.3 ~ 1000 Hz max. (frequency mode) 5000 Hz max. (counter mode)	5 Hz ~ 1 MHz max. (frequency mode) 1 MHz max. (counter mode)	-	-
	Mode	-	Frequency, Up/Down Counter, Bi-direction Counter	Frequency, Counter (Up/Down, Bi-direction, Up, A/B Phase)	-	-
Communication	Channels	-	-	-	4	2
	Type	-	-	-	RS-232	CAN
Isolation		-	1,000 V _{RMS}	2,500 V _{DC}	-	1,000 V _{DC}
Page		online	online	online	online	online

ADAM-5000 Controller Support Table

Type		PAC			PC-based Controller		
System		ADAM-5560KW	ADAM-5510KW ADAM-5510EKW	ADAM-5510KW/TCP ADAM-5510EKW/TP	ADAM-5560CE	ADAM-5510/TCP ADAM-5510E/TCP	ADAM-5510M ADAM-5510E
Function	I/O Module	7-slot Micro PAC with Atom™ CPU	4/8-slot Softlogic Controller w/ RS-485	4/8-slot Softlogic Controller w/ Ethernet	7-slot PC-based Controller with Atom™ CPU	4/8-slot PC-based Controller with Ethernet	4/8-slot PC-based Controller with RS-485
Analog Input (AI)	ADAM-5013	•	•	•	•	•	•
	ADAM-5017	•	•	•	•	•	•
	ADAM-5017P	•	-	-	•	•	•
	ADAM-5017H	-	•	•	-	•	•
	ADAM-5017UH	•	-	-	•	•	•
	ADAM-5018	•	•	•	•	•	•
	ADAM-5018P	•	-	-	•	•	•
Analog Output (AO)	ADAM-5024	•	•	•	•	•	•
Digital Input (DI)	ADAM-5051	•	•	•	•	•	•
	ADAM-5051D	•	•	•	•	•	•
	ADAM-5051S	•	•	•	•	•	•
	ADAM-5052	•	•	•	•	•	•
	ADAM-5053S	•	-	-	•	-	-
Digital Output (DO)	ADAM-5056	•	•	•	•	•	•
	ADAM-5056D	•	•	•	•	•	•
	ADAM-5056S	•	•	•	•	•	•
	ADAM-5056SO	•	•	•	•	•	•
	ADAM-5057S	•	-	-	•	-	-
Digital I/O	ADAM-5050	•	•	•	•	•	•
	ADAM-5055S	•	•	•	•	•	•
Relay Output	ADAM-5060	•	•	•	•	•	•
	ADAM-5069	•	•	•	•	•	•
Counter/ Frequency	ADAM-5080	-	•	•	-	•	•
	ADAM-5081	•	-	-	•	•	•
Comm.	ADAM-5090	-	•	•	-	•	•
	ADAM-5095	•	-	-	•	-	-
Motion	ADAM-5202	•	-	-	•	-	-
	ADAM-5240	•	-	-	•	-	-
SD	ADAM-5030	•	-	-	•	-	-

1
WebAccess+ Solutions

2
Motion Control

3
Power & Energy
Automation

4
Automation Software

5
Intelligent Operator
Panel

6
Automation Panels

7
Panel PCs

8
Industrial Wireless
Solutions

9
Industrial Ethernet
Solutions

10
Industrial Gateway
Solutions

11
Serial communication
cards

12
Embedded Automation
PCs

13
DIN-Rail IPCs

14
CompactPCI Systems

15
IoT Wireless I/O
Modules

16
IoT Ethernet I/O
Modules

17
RS-485 I/O Modules

18
Data Acquisition
Boards

ADAM-5000 Remote I/O System Support Table

Remote I/O System			ADAM-5000/485	ADAM-5000E	ADAM-5000L/TCP	ADAM-5000/TCP
Function	I/O Module	Description	4-slot Distributed DA&C for RS-485	8-slot Distributed DA&C for RS-485	4-slot Distributed DA&C for Ethernet	8-slot Distributed DA&C for Ethernet
Analog Input (AI)	ADAM-5013	3-ch RTD Input	•	•	•	•
	ADAM-5017	8-ch AI	•	•	•	•
	ADAM-5017P	8-ch AI w/ Independent Input Range	•	•	•	•
	ADAM-5017H	8-ch high Speed (1K) AI	•	•	•	•
	ADAM-5017UH	8-ch Ultra high Speed (200K) AI	•	•	•	•
	ADAM-5018	7-ch Thermocouple Input	•	•	•	•
	ADAM-5018P	7-ch Thermocouple Input w/ Independent Input Range	•	•	•	•
Analog Output (AO)	ADAM-5024	4-ch AO	•	•	•	•
Digital Input (DI)	ADAM-5051	16-ch DI	•	•	•	•
	ADAM-5051D	16-ch DI w/ LED	•	•	•	•
	ADAM-5051S	16-ch Isolated DI w/ LED	•	•	•	•
	ADAM-5052	8-ch Isolated DI	•	•	•	•
Digital Output (DO)	ADAM-5056	16-ch DO	•	•	•	•
	ADAM-5056D	16-ch DO w/ LED	•	•	•	•
	ADAM-5056S	16-ch Isolated DO w/ LED	•	•	•	•
	ADAM-5056SO	16-ch Source Type Isolated DO w/ LED	•	•	•	•
Digital I/O	ADAM-5050	16-ch Universal Digital I/O	•	•	•	•
	ADAM-5055S	16-ch Isolated Digital I/O w/ LED	•	•	•	•
Relay Output	ADAM-5060	6-ch Relay Output	•	•	•	•
	ADAM-5069	8-ch Power Relay Output w/ LED	•	•	•	•
Counter/ Frequency	ADAM-5080	4-ch Counter/ Frequency	•	•	•	•
	ADAM-5081	4-ch High Speed Counter/Frequency	•	•	•	•

ADAM-5560CE/XPE ADAM-5560KW

7-slot PC-based Controller with Intel® Atom™ CPU

7-slot Micro PAC with Intel® Atom™ CPU

NEW



RoHS
CE FCC

Features

- Optional SCADA software WebAccess through CTOS
- Integrated VGA port for local display of HMI software
- Can be operated with or without display/ keyboard/ mouse
- Remote monitoring through Web Server
- Remote maintenance via FTP Server
- Supports .NET class library in Windows CE and XP embedded
- Supports IEC-61131-3 SoftLogic Control Software
- Supports Modbus/RTU (Master/Slave) and Modbus/TCP (Server/Client)
- Supports SD Storage I/O Module
- Remote I/O expansion
- Supports ADAM-5000 I/O Modules

Introduction

The ADAM-5560 is a Programmable Automation Controller designed for control tasks which require Industrial PC computing performance with a PLC's robustness. The ADAM-5560 offers an Intel Atom CPU along with control specific features such as watchdog timer, battery backup RAM and deterministic I/O. The ADAM-5560KW features 5 standard IEC 61131-3 programming languages in Windows CE, so PLC users can develop control strategies with their own familiar programming languages. The powerful Multiprog KW Software and stable ProConOS have caused the ADAM-5560KW to become the best choice for a Programmable Automation Controller on the market today. Besides, the ADAM-5560CE offers an open platform that helps users to develop their own program using the common eVC and .NET programming environments to build compact and reliable control solutions. With the optional HMI Software and built-in VGA port, users no longer need to build additional SCADA PC's into their applications. This compact and powerful PAC is ideal for a variety of applications ranging from machine automation to SCADA applications.

Specifications

Control System

- CPU** Intel Atom Z510P
- I/O Capacity** 7 slots
- LED Indicators** Power, User defined
- Memory** 1 GB DDR2 SDRAM
1 MB Battery Backup
1 x CompactFlash® Card (Internal, 4GB)
- Operating System** Windows® CE5.0/Windows XP Embedded
- Real-time Clock** Yes
- Watchdog Timer** Yes
- Control Software** ADAM-5560CE: eVC and .NET library
ADAM-5560XPE: .NET library
ADAM-5560KW: KW Multiprog (development tool)
ProConOS (runtime Kernel)

Communications

- Comm. Protocol** Modbus/RTU and Modbus/TCP
- Medium** 2 x 10/100 Base-T w/ RJ-45
4 x RS-485 w/ DB9

Protection

- Communication** RS-485 Isolation 1.5kV for COM1, COM3 and COM4
RS-485 Isolation 2.5kV for COM2
- Power Reversal** Yes

Power

- Power Consumption** 17w @ 24 V_{DC} (Not include I/O modules)
- Power Input** 12 ~ 24 V_{DC}, ± 20%

General

- Certification** CE, FCC Class A
- Connectors** 1 x RS-232/485 (COM1)
1 x RS-485 (COM2)
1 x RS-232/485 (COM3)
1 x RS-232/485 (COM4)
2 x USB 2.0 ports (KB/Mouse via USB Ports)
1 x VGA (1024 x 768 Resolution)
- Dimensions** 355 x 110 x 75 mm
- Enclosure** ABS+PC
- Mounting** DIN-rail, wall mount (panel mount)
- Plug-in Screw Terminal** Accepts 0.5 mm² to 2.5 mm², 1 – #12 or 2 – #14 to #22 AWG

Environment

- Humidity** 5% to 95%, non-condensing
- Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- Open Platform Solution**
ADAM-5560 7-slot PC-based Controller with Intel ATOM CPU
SQF-P10S2-16G-ETE Suggested 16G CF NR, DMA (-40 ~ 85°C)
2070012906 WES2009 Eng. for ADAM-5560
- ADAM-5560CE** 7-slot PC-based Controller with Intel ATOM CPU (WinCE5.0)
- ADAM-5560KW** 7-slot Micro PAC with Intel Atom CPU

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards

ADAM-5560WA

7-slot Compact SCADA Controller with 600 Tags WebAccess

NEW



WebAccess



Features

- Bundled with Advantech WebAccess, browser based HMI/SCADA software
- Built-in Windows XP Embedded
- Fanless design with no internal cabling
- Remote monitoring through Web Server
- Remote maintenance via FTP Server
- Supports .NET class library in Windows XP embedded
- Supports more than 200 industrial protocols by 4 isolated comports and 2 LANs
- Onboard system status LED indicators
- Front-accessible design
- Remote I/O expansion
- Supports ADAM-5000 I/O Modules

Introduction

The ADAM-5560WA is a compact SCADA controller with 7-slots. It is built on Advantech's solid platform and comes pre-installed with WebAccess SCADA software and pre-configured with Windows XP Embedded and the IIS environment. Just plug in the power and a network cable and the web enabled browser-based controller is ready for users to start configuring the SCADA system and IO from a computer. This compact SCADA controller is powered by an Intel Atom Z510P processor. It provides excellent computing power with low power consumption. It also has a direct I/O connection to form a space saving controller system.

WebAccess Professional Version

- **I/O Tag Number** 600
- **Internal Tag Number** 600
- **Web Client** 1024
- **Alarm Logs** 5000
- **Action Logs** 5000
- **Node** SCADA Node
- **Graphics** Unlimited Number of Graphic Pages, Global Tag Source
- **Number of data logs** Number of I/O Tag Licenses x 2
- **Others** SCADA Redundancy
TelScript / VBScript / Jscript Language
Data Transfer and Reporting
ODBC and SQL Query
Device Redundancy

Specifications

Control System

- **CPU** Intel Atom Z510P
- **I/O Capacity** 7 slots
- **LED Indicators** Power, User defined
- **Memory** 1 GB DDR2 SDRAM
- **Storage** 1 x CompactFlash® Card (Internal, 4GB)
- **Operating System** Windows XP Embedded (WES2009)
- **Real-time Clock** Yes
- **Watchdog Timer** OS and Application

Protection

- **Communication** RS-485 Isolation 1.5kV for COM1, COM3 and COM4
RS-485 Isolation 2.5kV for COM2
- **Power Reversal** Yes

Power

- **Power Consumption** 17W @ 24 V_{DC} (Not include I/O modules)
- **Power Input** 12 ~ 24 V_{DC}, ± 20%

General

- **Certification** CE, FCC Class A
- **Dimensions** 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall mount (panel mount)
- **Plug-in Screw Terminal** Accepts 0.5 mm² to 2.5 mm², 1 – #12 or 2 – #14 to #22 AWG

I/O Interfaces

- **Serial Ports** 1 x RS-485, Terminal, 50~115.2kbps
3 x RS-232/485, DB9, 50~115.2kbps
- **LAN Ports** 2 x RJ-45, 10/100Mbps
- **USB Ports** 2 x USB2.0
- **Displays** 1 x VGA, support 1024 x 768

Environment

- **Humidity** 5% to 95%, non-condensing
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-5560WA-T600E** 7-slot Compact SCADA Controller with 600 Tags WebAccess (Traditional Chinese)
- **ADAM-5560WA-C600E** 7-slot Compact SCADA Controller with 600 Tags WebAccess (Simplified Chinese)
- **ADAM-5560WA-E600E** 7-slot Compact SCADA Controller with 600 Tags WebAccess (English)

ADAM-5510 Series

4/8 slots PC-based Controller



ADAM-5510E

ADAM-5510



Features

- Supports Modbus/RTU, Modbus/TCP Master and Slave function libraries
- Windows-based utility
- Optional support C Programming and IEC-61131-3 standard
- Complete set of I/O modules
- Built-in real-time clock and watchdog timer
- ROM-DOS operating system
- 4 serial communication ports
- Optional support Ethernet Interface with network function, such as Web Server, FTP Server and Email Alarm.
- 4 or 8 I/O slot expansion

Introduction

The ADAM-5510 Series are ideal for PC-based data acquisition and control applications. They are compact, controllers with an Intel x86- based CPU running Datalight ROM-DOS. Built-in battery backup SRAM is the best choice for complex logic or data storage applications. For professional C/C++ programmers, the ADAM-5510 Series application programs may be written and compiled in Borland C++ 3.0, and downloaded to the controller.

For user who familiar with PLC programming environment, we provide the option for customer to use the KW softlogic which supports 5 standard IEC 61131-3 programming languages, including LD/FB/SFC/IL/ST.

Specifications

Control System

- **CPU** 80188, 16-bit microprocessor
- **I/O Slots** Optional 8 or 4 slots
- **LED Indicators** Power, CPU, communications and battery
- **Memory** Flash disk: 1 MB (960 KB for user applications)
Flash memory: 256 KB
Flash ROM: 256 KB
RAM: 640 KB (up to 384 KB with battery backup)
- **Memory (Softlogic version)** Flash disk: 512KB
Flash memory: 768KB
Flash ROM: 256KB
RAM: 640KB SRAM, 32KB with battery backup (ADAM-5510KW)
RAM: 768KB SRAM, 17KB with battery backup (ADAM-5510KW/TCP, ADAM-5510EKW/TP)
ROM-DOS (MS-DOS 6.22 Compatible)
- **Operating System** ROM-DOS
- **Real-time Clock** Yes
- **Watchdog Timer** Yes

Serial Communication

- **Max. Nodes** 256 (in RS-485 daisy-chain network)
- **Distance** 1.2 km (4,000 feet)
- **Speed** 1,200 bps ~ 115.2 kbps (9600, 19200, 38400 bps for Softlogic version)
- **Isolation** 2500 V_{DC} (COM2 only)

Ethernet Communication

- **Medium** Cat.5 cable with RJ-45 connector
- **Distance** 100 m
- **Speed** 10/100Base-T

Power

- **Power Consumption** 4 W @ 24 V_{DC} (not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V_{DC}
- **Isolation** 3000 V_{DC}
- **Reverse Protection** Yes

Software

- **ROM DOS version** C library for Borland C++ 3.0
- **Softlogic version** Development tool : KW Multiprog
Runtime kernel : ProConOS

General

- **Certification** CE, FCC Class A
- **Connectors** COM1 : DB9-M
COM2 : Screw terminal (RS-485)
COM3 : DB9-F (RS-232/Programming)
COM4 : DB9-M (RS-232/485)
Power : Screw terminal
LAN : RJ-45 (option)
- **Dimensions** 4-slot: 231 x 110 x 75 mm
8-slot: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, stack, wall

Environment

- **Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storing Temperature** -25 ~ 85°C (-13 ~ 185°F)


Ordering Information

- **ADAM-5510M** 4-slot PC-based Controller
- **ADAM-5510E** 8-slot PC-based Controller
- **ADAM-5510/TCP** 4-slot PC-based Controller with Ethernet
- **ADAM-5510E/TCP** 8-slot PC-based Controller with Ethernet
- **ADAM-5510KW** 4-slot Softlogic Controller
- **ADAM-5510KW/TCP** 4-slot Softlogic Controller with Ethernet
- **ADAM-5510EKW/TP** 8-slot Softlogic Controller with Ethernet
- **MPROG-PRO535E** KW Multiprog Pro v5.35 (128k bytes I/O, Win7 support)

ADAM-5000/485 ADAM-5000E

4-slot Distributed DA&C System for RS-485

8-slot Distributed DA&C System for RS-485

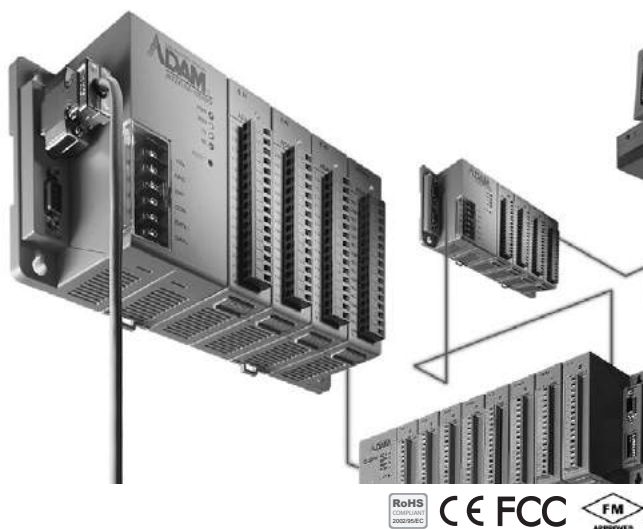

Features

- RS-485 communication for easy installation and networking
- 4 or 8 slots for up to 128 points data monitoring card control in one module
- Extensive software support, includes windows DLL drivers, OCX drivers, OPC server and popular HMI/SCADA software drivers
- Seamlessly integrated with easy-to-use ADAMView data acquisition software
- Supports ADAM ASCII protocol or Modbus®/RTU protocol
- Supports Modbus/RTU protocol with user-defined Modbus address

Introduction

The ADAM-5000/485 and ADAM-5000E systems conform to the EIA RS-485 communication standard. This is the industry's most widely used, balanced, bidirectional transmission line standard. RS-485 was specifically developed for industrial applications to transmit and receive data at high rates over long distances.

Specifications

Control System

- **CPU** 16-bit 80188 microprocessor
- **I/O Slots** ADAM-5000/485: 4
ADAM-5000E: 8
- **LED Indicators** Power, CPU, communications
- **Watchdog Timer** 1.6 sec. (System)

Communications

- **Command Format** ASCII command/response protocol, Modbus/RTU
- **Communication Distance** RS-485: 1.2 km (4000 feet)
- **Data Format** Asynchronous. 1 start bit, 8 data bits, 1 stop bit, no parity
- **Network Protocols** Programming link: RS-232 (3-wire: TX, RX, GND)
Communication: RS-485 (2-wire)
- **Reliability Check** Communication error checking with checksum
- **Max. Nodes** 128 (in RS-485 daisy-chain network)
- **Speeds (kbps)** 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6, and 115.2

Power

- **Power Consumption** 3 W @ 24 V_{DC} (ADAM-5000/485)
(not including I/O modules)
4.0 W @ 24 V_{DC} (ADAM-5000E)
(not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V_{DC}

Software

- **Driver Support Windows DLL, OPC Server, Wonderware InTouch, Intellution, iFIX, Citect, Advantech Studio, ADAMView**
- **C and .NET Class Library**

Protection

- **Communication Line Isolation** 2,500 V_{DC} (ADAM-5000/485)
3,000 V_{DC} (ADAM-5000E)
- **I/O Module Isolation** 3,000 V_{DC}
- **Transient Protection** RS-485 communication lines, power input
- **Power Reversal Protection** Yes

General

- **Certification** CE, FM
- **Connectors** 1 x DB9-M/DB9-F/screw terminal for RS-485 (communication)
1 x DB9-F for RS-232 (configuration)
1 x Screw-terminal for power input
- **Dimensions (WxHxD)** 4-slot: 231 x 110 x 75 mm
8-slot: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall, rack (with mounting kit)

Environment

- **Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storing Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-5000/485** 4-slot Distributed DA & C System for RS-485
- **ADAM-5000E** 8-slot Distributed DA & C System for RS-485

ADAM-5000L/TCP ADAM-5000/TCP

4-slot Distributed DA&C System for Ethernet 8-slot Distributed DA&C System for Ethernet



ADAM-5000/TCP

ADAM-5000L/TCP



Features

- Cortex M4 CPU
- 10/100Base-T auto-negotiation high-speed communication port
- Supports Modbus/TCP for easy integration
- Supports UDP event handling function
- Up to 100 m communication distance w/o repeater
- Allows remote configuration via Ethernet
- Allows concurrent access for 16 host PCs
- 4 I/O slots for up to 64 points and 8 I/O slots for up to 128 points data monitoring and control
- 1500 V_{DC} isolation for Ethernet communication
- Built-in watchdog timer for system auto-reset
- Windows utility
 - I/O modules configuration and calibration
 - Network auto searching
 - Data stream setting
 - Current status monitoring and alarm trigger
- Provides C and .NET class library to develop applications
- Support GCL function for easy IO interlocking logic

Introduction

The ADAM-5000L/TCP and ADAM-5000/TCP are both Ethernet-based I/O systems. Without a repeater, the ADAM-5000L/TCP and ADAM-5000/TCP can cover a communication distance up to 100 m. This allows remote configuration via Ethernet and sixteen PCs can simultaneously access the data. The ADAM-5000L/TCP and ADAM-5000/TCP are the solutions for easy configuration and efficient management. It is an ideal and cost-effective solution for eAutomation architecture.

Specifications

Control System

- **CPU** Cortex M4
- **I/O Slots** ADAM-5000L/TCP: 4
ADAM-5000/TCP: 8
- **Memory** Flash ROM: 1 MB
- **Operating System** Real-time OS
- **LED Indicators** Power (3.3 V)
RUN
Communication (Link, Active, 10/100 Mbps, Tx, Rx)
- **Storage** 1 x MicroSD slot

Communications (Ethernet)

- **Data Transfer Rate** Up to 100 Mbps
- **Event Response Time** < 5 ms
- **Interface** 2 x RJ-45 sharing one MAC Address
- **Wiring** UTP, category 5 or greater

Communications (Serial)

- **Comm. Distance** RS-485: 1.2 km (4000 feet)
RS-232: 15 m
- **Comm. Protocol** Modbus/RTU
- **Data Transfer Rate** Up to 115.2 kbps
- **Interface** 1 x DB9-M for RS-485
1 x DB9-F for RS-485
1 x DB9-F for RS-232 (System Monitoring)
- **Max. Nodes** 15 (in RS-485 daisy-chain network for Remote I/O connection)

Power

- **Power Consumption** 4.0 W @ 24 V_{DC} (ADAM-5000L/TCP)
(not including I/O modules)
5.0 W @ 24 V_{DC} (ADAM-5000/TCP)
(not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V_{DC}

Software

- **API** VS.NET Class Library
- **Windows Utility** Network setting, I/O configuration & calibration, data stream, alarm setting
- **Modbus/TCP OPC Server**

Protection

- **Communication Line Isolation** 3.000 V_{DC}
- **I/O Module Isolation** 3.000 V_{DC}
- **LAN Communication** 1.500 V_{DC}
- **Overvoltage Protection** Yes
- **Power Reversal Protection** Yes

General

- **Certification** CE, FCC class A
- **Connectors** 1 x DB9-M/DB9-F/screw terminal for RS-485 (communication)
1 x DB9-F for RS-232 (internal use)
1 x Screw-terminal for power input
2 x RJ-45 for LAN
- **Dimensions (W x H x D)** ADAM-5000L/TCP: 231 x 110 x 75 mm
ADAM-5000/TCP: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall

Environment

- **Operating Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-5000L/TCP** 4-slot Ethernet-based Distributed DA & C System
- **ADAM-5000/TCP** 8-slot Ethernet-based Distributed DA & C System

- 1 WebAccess+ Solutions
- 2 Motion Control
- 3 Power & Energy Automation
- 4 Automation Software
- 5 Intelligent Operator Panel
- 6 Automation Panels
- 7 Panel PCs
- 8 Industrial Wireless Solutions
- 9 Industrial Ethernet Solutions
- 10 Industrial Gateway Solutions
- 11 Serial communication cards
- 12 Embedded Automation PCs
- 13 DIN-Rail IPCs
- 14 CompactPCI Systems
- 15 IoT Wireless I/O Modules
- 16 IoT Ethernet I/O Modules
- 17 RS-485 I/O Modules
- 18 Data Acquisition Boards