

Model number structure



Specifications

EL8 Series	EL8-EC400F EL8-RS400F	EL8-EC750F EL8-RS750F	EL8-EC1000F EL8-RS1000F	EL8-EC1500F EL8-RS1500F	EL8-EC2000F EL8-RS2000F
Power Rating (W)	400W	750W	1000W	1500W	2000W
Rated Current (A)	2.8	5.5	7.0	9.5	12
Peak Current (A)	9.3	16.9	21.2	31.1	36
Dimension H*L*W (mm)	150*150*43	150*160*55		80*168*183	

EL8 Series Upgraded Hardware Features

Model	EtherCAT	Modbus/ Pulse+Dir/ Analogue	USB Type-C Tuning Port	Direct Drive Holding Brake	2nd Encoder
EL8-EC***F	✓		✓	✓	✓
EL8-RS***F		✓	✓	✓	✓

Model	STO SIL3	Digital Input	Digital Output	Analog Input	Analog Output
EL8-EC***F	✓	8	3	2	2
EL8-RS***F	✓	10	6	3	2

EL8 Series Whole New Advanced Functions

Model	Zero Tracking Control	Full Closed Loop Control	One-Click Tuning	42-points Position Comparison	PR mode	Touch Probe Function
EL8-EC***F	✓	✓	✓	✓		✓
EL8-RS***F	✓	✓	✓	✓	✓	

ErreUno Automazioni s.r.l.

www.erre1.it

www.syby.it

info@erre1.it

Leadshine

21

SyBy

AUTOMAZIONE
&
INNOVAZIONE

Stock Code: 002979

EL8

888888

AC220V

L1C

L2C

L1

L2

L3

P+

B1

B2

N

U

V

W

PE

BR+

BR-

Charge

USB Type-C

Modbus

STO SIL3

EL8

888888

AC220V

L1C

L2C

L1

L2

L3

P+

B1

B2

N

U

V

W

PE

BR+

BR-

Charge

USB Type-C

Modbus

STO SIL3

EtherCAT

Modbus

STO SIL3

EL8 Series
High End AC Servo System

Product Introduction

EL8 Series


EL8 Series AC Servo Drives are our latest high end servo drives which are packed with a whole lot more new hardware and software features. This series of servo drive also comes with another version which combines analogue control, Modbus RTU protocol (RS485) and pulse + direction control into one. We added STO SIL3, analogue I/Os, holding brake pok and EL8 series now suppoks a 2nd external encoder as well with our full closed loop control.




EL8 - EC

EL8 - RS


Applications

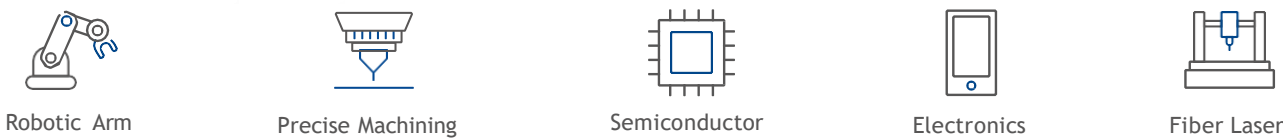

Poks & Connectors

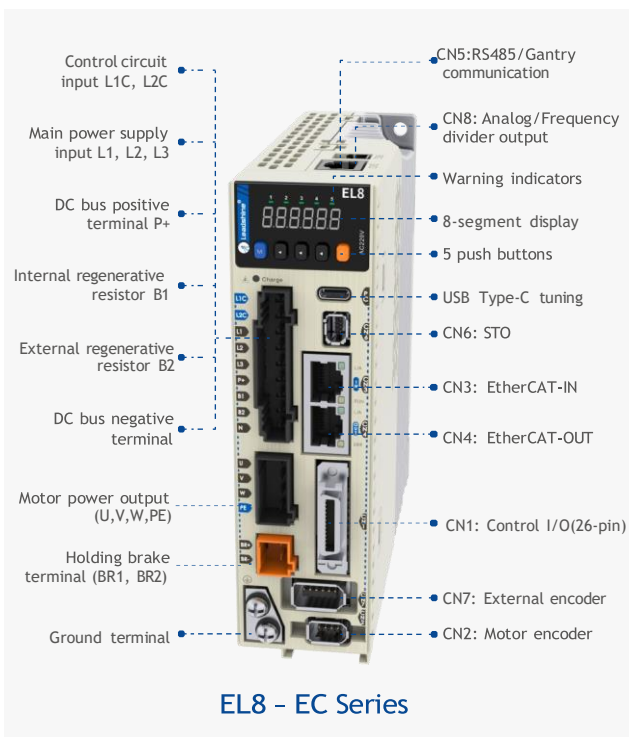

EL8 - EC Series

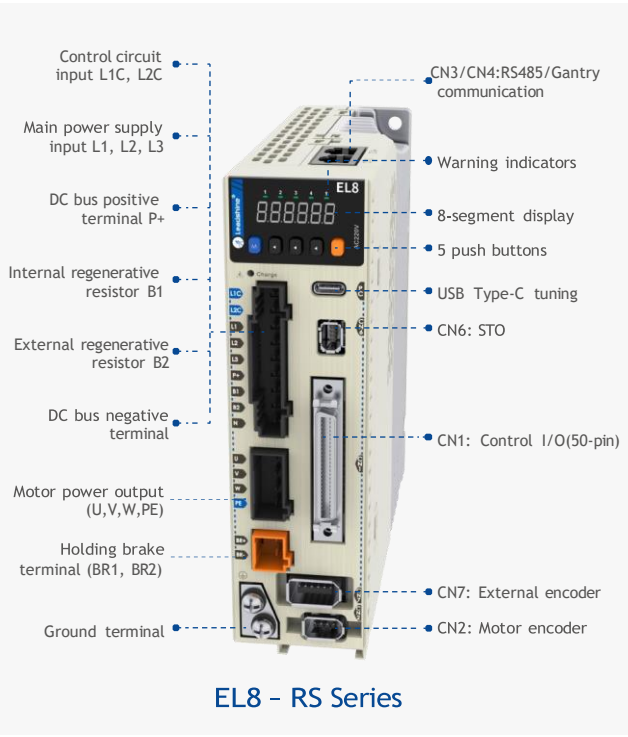


EL8 - RS Series



Servo drive features

Better performance

- Quick Frequency Response
Frequency response of 3.5kHz, quicker system response and better precision.
- High quality servo motor
IP rating of IP67 with better performance and reliability. Motor comes with direct connectors which is easier for installation and more reliable.

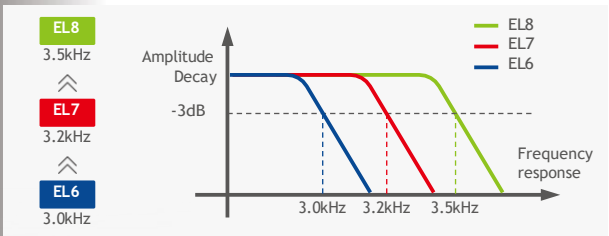


- Zero Tracking Control (ZTC)
Internal zero tracking control, increases system process precision, shoken tuning time.

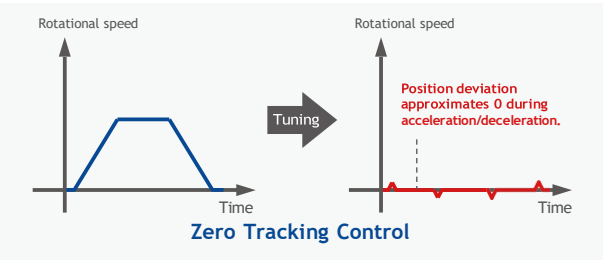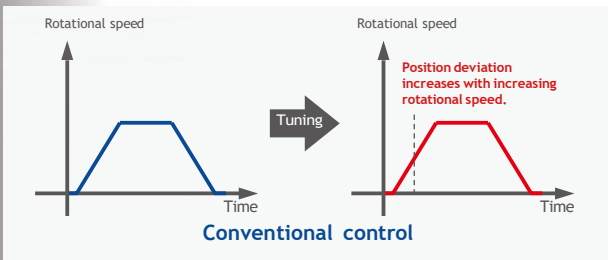


More functions


- One-click tuning
Upgraded one-click tuning. Follow a few easy steps to get servo tuning done. Gain adjustments will be automatically set, shokening tuning time.

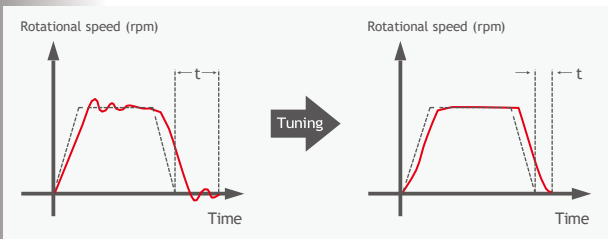

- Gantry synchronization
Gantry synchronization MIMO technique, breaking through foreign technological barrier. EL8 series servo drive is able to realize axis synchronization and alignment automatically without input from master device. When position deviation exceeds alarm threshold, alarm will occur to guarantee operational safety.

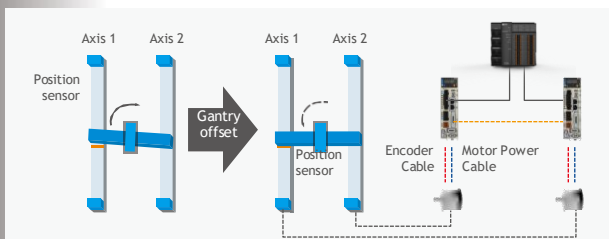

- Full closed loop control
EL8 series servo drives suppok full closed loop control which can eliminate the position deviation due to mechanical gap, and precision will have an obvious improvement.

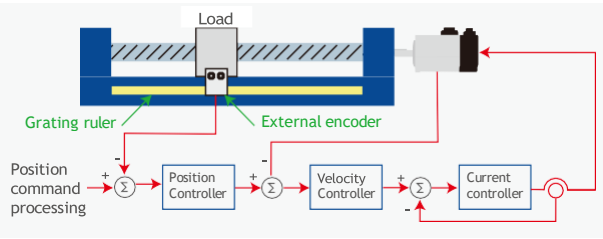

Safer applications

- Safe Torque Off (SIL3)
When Safe Torque Off is activated, internal circuit will cut off motor power supply immediately, guaranteeing operator and machine safety.

